


SECTION "A-A"

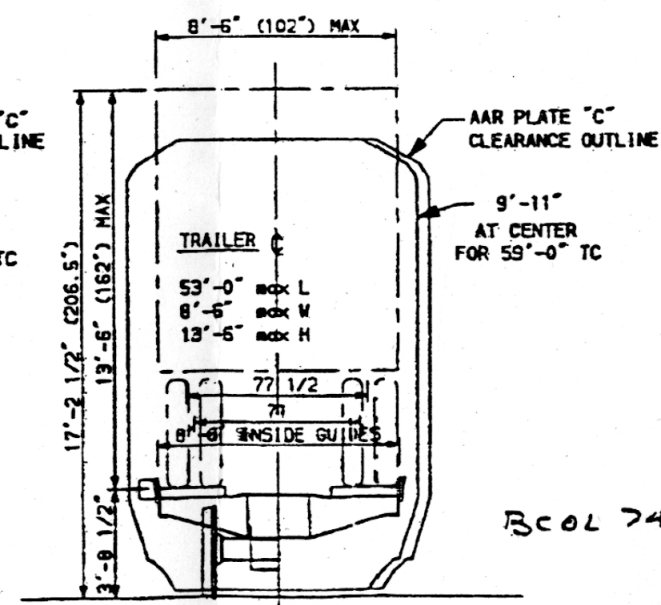

SECTION "B-B"

DRAFT GEAR - STANDARD H-9016  
TRAILER HITCHES - CUSHIONED

TRAILER CAPACITY - ALL UNITS

| LENGTH    | CAPACITY | KING PIN TO NOSE |
|-----------|----------|------------------|
| 28 FT.    | 65,000   | 30 - 48 IN.      |
| 40 FT.    | 85,000   | 30 - 48 IN.      |
| 45-48 FT. | 90,000   | 30 - 48 IN.      |
| 53 FT.    | 90,000   | 36 - 48 IN.      |

≡ PROVISION FOR ADDITIONAL 24" MAX REEFER UNIT

CONTAINER CAPACITY - SPECIFIED UNITS

| LENGTH    | CAPACITY    | WIDTH          | HEIGHT                  |
|-----------|-------------|----------------|-------------------------|
| END UNITS | 2 = 20 FT.  | 2 = 53,000 Lb. | 8'-0" 8'-6" MAX         |
| ALL UNITS | 40 FT.      | 57,200 Lb.     | 8'-0" 8'-6" MAX         |
| ALL UNITS | 45 - 53 FT. | 72,000 Lb.     | 8'-6 3/8" 9'-6 1/2" MAX |

CANNOT CARRY 2 = 53,000 lb CONTAINERS ON END UNITS WHILE CARRYING 90,000 lb TRAILER ON CENTER UNIT.

BCOL 7400-7414

|   |        |             |
|---|--------|-------------|
| TITLE 3-UNIT ARTICULATED TRAILER/CONTAINER<br>FLAT CAR FOR CIRCUS LOADING - B.C. RAIL |        |             |
| NATIONAL STEEL CAR LIMITED  | DWG    | REV         |
| HAMILTON  | CANADA | 215-144/4 - |