


LOCO. NO. 2501
2502

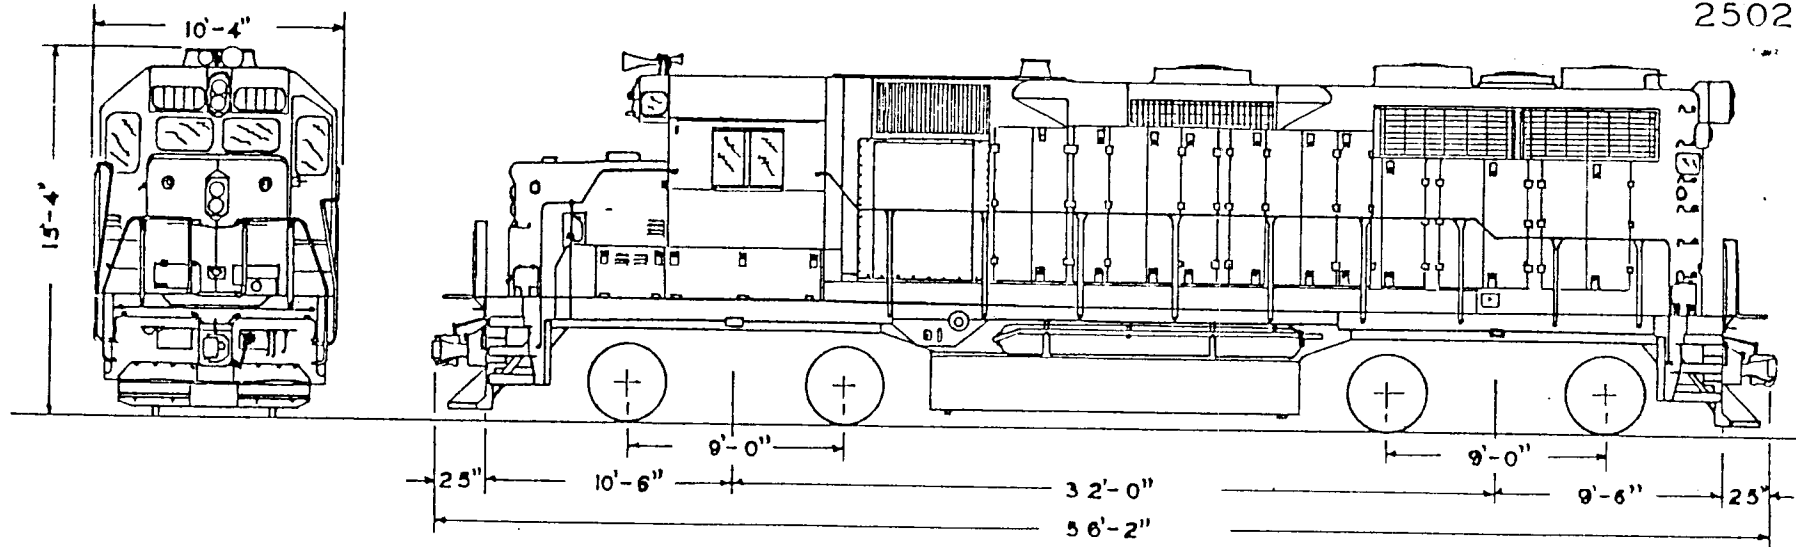

BUILT BY	GENERAL MOTORS CORP. E.M.D.
DATE BUILT	1964
PLACED IN SERVICE - 2501-1964 / 2502-2503-	1965
PURCHASED FROM	G.M.C.-E.M.D.
WHEEL DIA.	40"
JOURNALS	HYATT - 6 1/2" X 12"
ENGINE	567D3A
MAX GOVERNED SPEED	900 R.P.M.
MAX IDLING SPEED	315 R.P.M.
CYLINDERS	16
BORE	8 1/2"
STROKE	10"
WT. IN WORKING ORDER W/ALL SUPPLIES	259,120 LBS.
WT. ON DRIVERS	259,120 LBS.
AIRBRAKE SCHEDULE	26 L.
BRAKE CYLINDERS	9" X 8"
AIR COMPRESSOR	GARDNER-DENVER
MODEL	WBO

GEAR RATIO:	62:15
SUPPLIES TOTAL CAPY.	
LUBRICATING OIL	243 GAL.
FUEL OIL	2,600 GAL.
ENG. COOLING WATER	275 GAL.
SAND	41 CU. FT.
MAX. TRACTIVE EFFORT W/VARIABLE SUPPLIES	
AT 25% ADHESION	
MAX. SAFE SPEED	71 M.P.H.
MAX. CURVATURE DEGREE	21°
MAX. OVERALL DIMENSIONS:	
HEIGHT	15'-3"
WIDTH	10'-4"
TRAIN LENGTH	56'-2"
2500 H.P. MODEL GP 35 ROAD LOCOMOTIVE	
EQUIPPED W/DYNAMIC BRAKES	

CK'D 3-83 RCK ALASKA RR