


MAX. LIFTING CAP'Y.			
30,000# AT 14 FT. RADIUS			
18,600	"	20"	"
10,900	"	30"	"
8,800	"	35"	"
7,300	"	40"	"

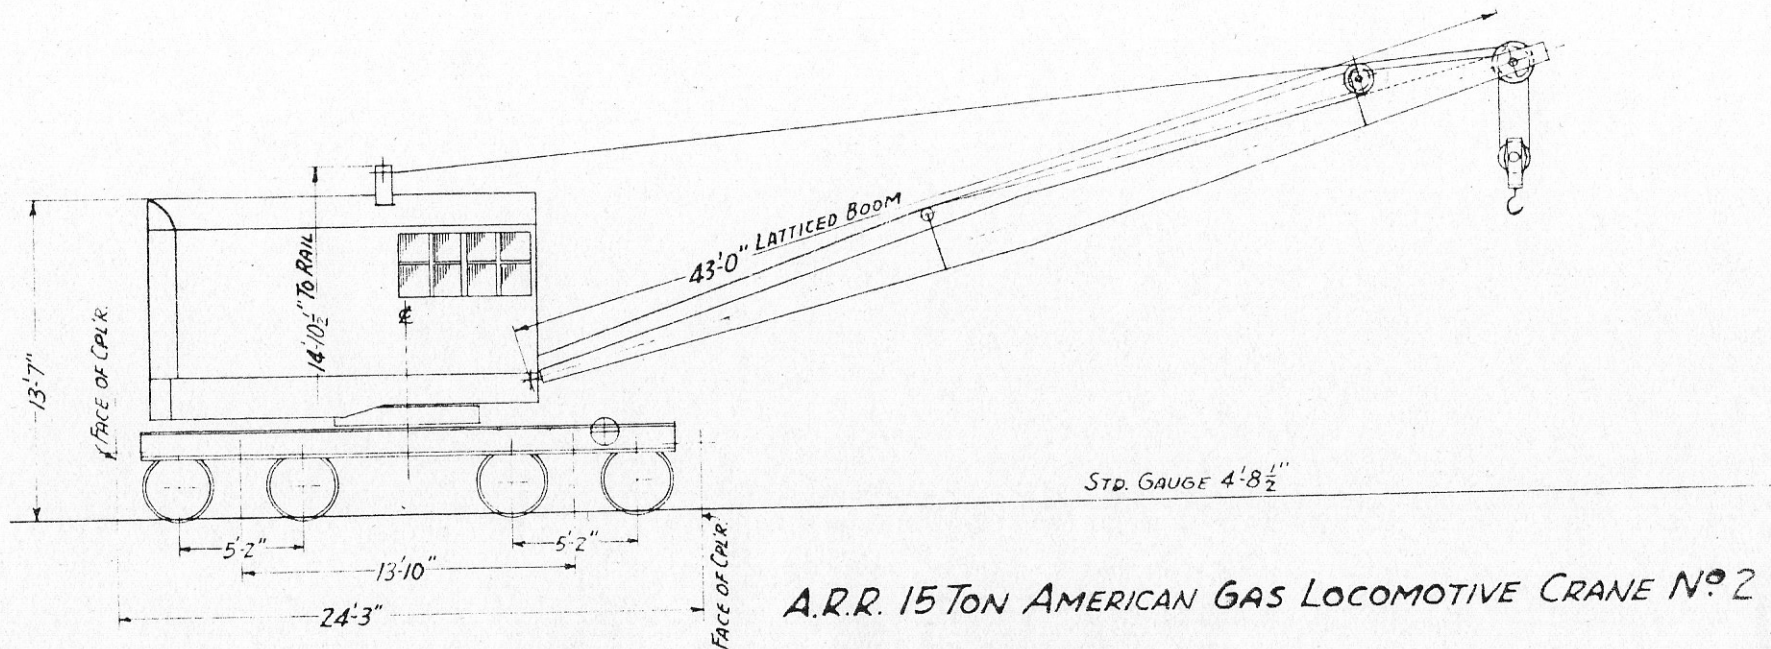

A.R.R. 15 TON AMERICAN GAS LOCOMOTIVE CRANE No 2

SPECIFICATIONS

BUILT BY AMERICAN HOIST & DERRICK CO., ST. PAUL, MINN.
 SECOND HAND EQUIP. PURCHASED FROM A.J. O'NEILL, LANSDOWNE, PA.
 PLACED IN SERVICE

ESTIMATED LIFE

15 TON GAS LOCO. CRANE SERIAL No 1453.

CAPACITY: SEE TABLE ABOVE.

FUNCTIONS - HOISTING (SINGLE DRUM), BOOM HOIST, SLEWING & TRAVELING

ENGINE: WAUKESHA "WS" 4J-5 3/4" x 8" SERIAL No WS 4J-110188.

TWIN DISC CLUTCH POWER TAKE OFF No 7595 (PT-33).

TOTAL WEIGHT:

TRACK SPEED:

AXLES: 5 1/2" x 10"

JOURNAL BOXES: NATIONAL

WHEELS: EIGHT 33" DIA. 750 LB. CAST STEEL.

GASOLINE CAP'Y: 88 GALLONS.

COUPLERS: A.R.A. TYPE "D" 5"x7" RIGID SHANK - 9" KNUCKLE

DRAFT GEAR:

BRAKE BEAM

TRUCKS: CAST STEEL SIDE FRAMES WITH SEPARATE JOURNAL BOXES

CENTER TO CENTER TRUCKS: 13'-10"

WHEELBASE TRUCKS: 5'-2"

BRAKES: HAND OPERATED. HAND WHEELS, OPPOSITE SIDES NEAR FRAME

TRAIN LENGTH: 24'-3"

LENGTH OF FRAME: 22'-2"