


12700-12749 FLAT CARS

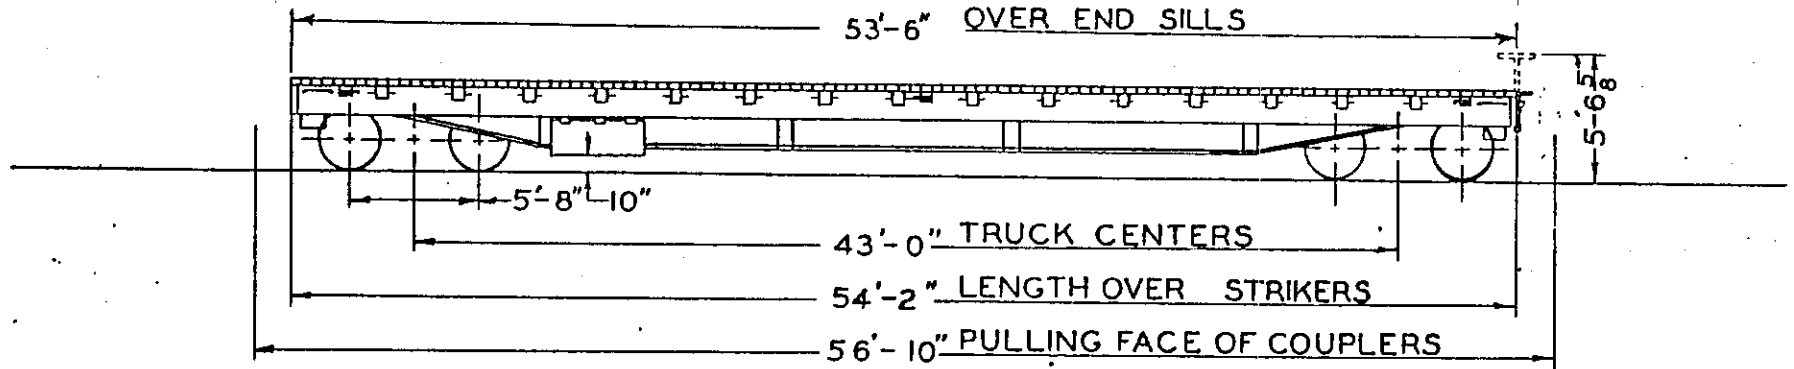

BUILT BY
 DATE BUILT
 REBUILT BY
 PURCHASED FROM
 PLACED IN SERVICE
 WHEELS
 TRUCKS
 AXLES
 BEARINGS
 UNDERFRAME
 LIGHTWEIGHT - LBS.
 CAPACITY - LBS.
 COUPLERS
 YOKES
 AIRBRAKES
 HANDBRAKES

WARREN CAR CO.
 1956

WARREN CAR CO
 1956 & 1957

BUCKEYE PEDESTAL TYPE
 6' X 11"

TIMKEN R.B.
 STEEL

60,500

140,000

TYPE, E RIGID SHANK BM. ROT. OP.
 VERTICAL W/ HORIZ. KEYS
 AB 10' X 12' CYL.
 SUPERIOR

GENERAL DIMENSIONS:

TRAIN LENGTH	56'-10"
MAX. HEIGHT	5'-6" ^{5/8}
WIDTH OVER SIDE SILLS	9'-6"
FROM RAIL TO TOP OF FLOOR	3'-9" ^{5/8}
MAX. WIDTH OVER STAKE POCKETS	10'-6" ^{5/8}

TRAINLINE JUMPER & CHOCK BLOCKS KEPT IN SPECIAL STORAGE COMPARTMENTS. 4 STEEL DECK PLATES FULL LENGTH OF CAR FOR PINNING CHOCK BLOCKS

ELECTRICAL EQUIPMENT: TRAINLINE WIRING 4 WIRE 200 AMPS. 240 VOLTS A.C. 3 BRANCH LINE RECEPTACLES 3 WIRE 4 POLE 20 AMP, 240 VOLTS.

CK'D 2-83 RCK

ALASKA RR